


WPS-FH2-C38PTF

- ★ Camera Pan 360°; Tilt 180° rotation
- ★ One-touch video recording and image capture
- ★ Zoom function (8 levels)
- ★ Detachable 512Hz transmitter

- ★ Cable M/FT counter and Keyboard typing
- ★ Support max 256GB SD card and USB stick
- ★ RCA CVBS/AHD input; HDMI/RCA video output
- ★ Longitudinal and horizontal style

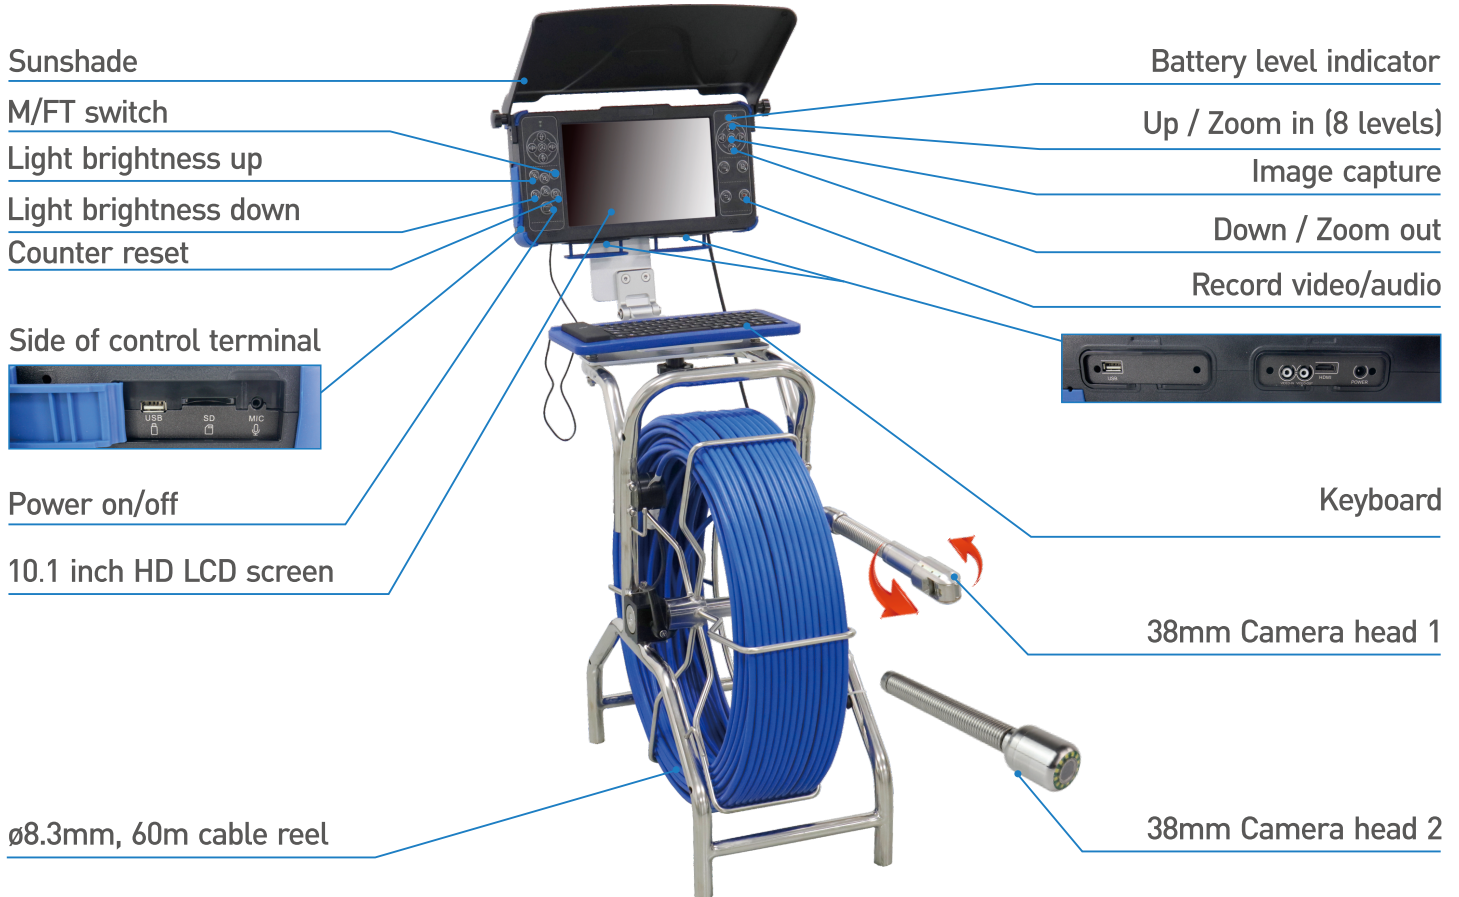

Accessories

C38PTF 	Camera size: ø38mm*200mm Pixel: 1280*720 View angle: 105° Leds: 2pcs Rotate: Pan 360°; Tilt180° Waterproof: IP68 Skid: 90mm Applicable range: DN 40-200mm Manual focusing, focal length 25-200mm Built-in 512Hz transmitter	K-FH1Pro 	10.1 inch HD LCD screen: 345*175*54mm Screen pixel: 1024*600 Storage medium: 64GB SD card & USB stick Video format: AVI Photo format: JPEG Battery: Li-ion- Battery 6000mAh 11.1V Running time: >4 hours 8 levels digital zoom M/FT switch and Count reset RCA CVBS/AHD input; HDMI/RCA video output
C38FH 	Camera size: ø38mm*232mm Pixel: 1920*1080 View angle: 120° Leds: 12pcs Skid: 75mm Replaceable pulley: 100/150/220mm Waterproof: IP68 Applicable range: DN 40-200mm Built-in 512Hz transmitter& Self-leveling	X-HD2 	Cable size: 460*270*560mm Cable length: 60m Cable diameter: ø8.3mm, 6-core coaxial Cable material: fiberglass rod Keyboard size: 300.8*115.8*12.25mm
Optional  512Hz transmitter	 512Hz transmitter & Self-leveling  Universal skid (80-180mm)		